


Smart Disk Light Installation Instructions

Thank you for purchasing this Energetic lighting product. We've created these easy- to-follow instructions to ensure you spend your time enjoying the product i nstead of putting it together.

PACKAGE CONTENTS

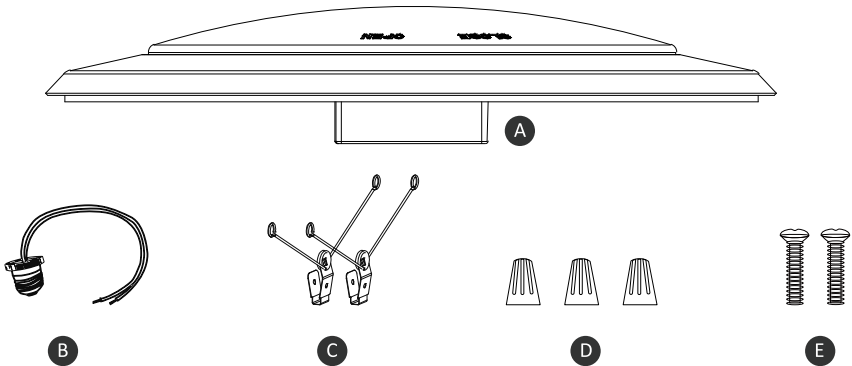

PACKAGE CONTENTS

SURFACE MOUNT			RETROFIT INSTALLATION		
PART	DESCRIPTION	QUANTITY	PART	DESCRIPTION	QUANTITY
A	LED DISK LIGHT	1	A	LED DISK LIGHT	1
D	Wire Nuts	3	B	E26 Adapter	1
E	Screws	2	C	Mounting Springs	2
			D	Wire Nuts	3

UNPACKING

Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the delivery carrier.

SAFETY INFORMATION

Please read carefully and save these instructions, as you may need them at a later date. When using electrical equipment, basic safety precautions should always be followed as below.








WARNING:

- Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.
- Risk of fire or electric shock. LED retrofit kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings. And where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- This retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction. Product must be installed by a qualified electrician in accordance with the applicable and appropriate electrical codes. The installation guide does not supersede local or national regulations for electrical installations.
- Suitable for wet locations.
- This fixture is App dimmable. App dimming range is 1-100%.
- Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.
- Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
- This device is not intended for use with emergency exits.

INSTALLATION










I. SURFACE MOUNT

- 1.** Make sure power off and the Junction Box is securely mounted before installation. (This disk light is compatible with 3.5" Junction Box), see Fig1.
- 2.** Remove lens by twisting clockwise, see Fig2.
- 3.** Remove the two stickers at the disk light back that read as 3.5" Junction Box installation hole to reveal the screw slots, see Fig3.
- 4.** Connect the supply wires to the wires of disk light by using 3 wire nuts. Attach white to white, black to black, green to the ground wire, see Fig4.
- 5.** Arrange the wires into the Junction Box.
Align appropriate slots in the disk light with the holes in the Junction Box. Use 2 screws to attach the disk light, flush with the ceiling, see Fig5.
- 6.** Placing the lens back into it's original position by twisting it in counter clockwise direction, see Fig6.
- 7.** Seal the edge of the fixture and the lens by using the waterproof glue, see Fig7.

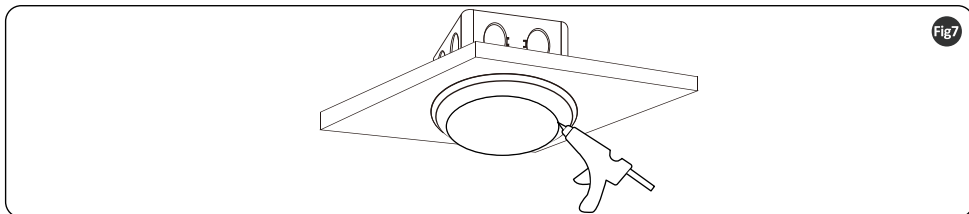

II. RETROFIT

- 1.** Make sure power off before installation. Remove the existing lamp and trim in the can, see Fig1.
- 2.** Screw the E26 adapter into the existing socket, see Fig2
- 3.** Remove lens by twisting clockwise, see Fig3
- 4.** Remove the two stickers at the disk light back that read as 5" or 6" Recessed installation hole to reveal the rectangular slots, see Fig4.
- 5.** Insert the mounting springs into the rectangular slots firmly, see Fig5
- 6.** Connect the supply wires from the E26 adapter to the wires of disk light by using 3 wire nuts. Attach white to white, black to black, green to the ground wire, see Fig6.
- 7.** Press spring clips together, push disk light up into can and release once in, continue pushing until flush with ceiling, see Fig7.
- 8.** Placing the lens back into it's original position by twisting it in counter clockwise direction, see Fig8.
- 9.** Seal the edge of the fixture and the lens by using the waterproof glue, see Fig9.



INSTALL THE APP


Download the "Smart Life" APP to connect and enjoy intelligent control.

NOTE: Only support 2.4 GHz Wi-Fi.

1. Search for Smart Life in Apple's App Store and other major app stores or scan the following QR code to download the **Smart Life** app.
2. Register a account

Log into the APP, enter your mobile phone number oremail address.

Note: Please select your region and country.

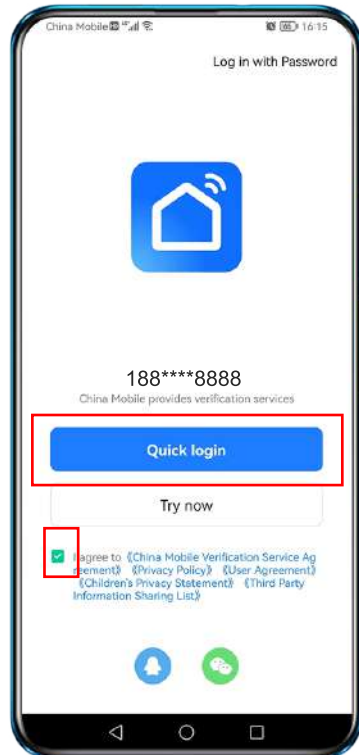

Turn on mobile phone WiFi, bluetooth

NOTE: Only support 2.4 GHz Wi-Fi.

Switch on and off 5 times on the wall switch, enter standby mode, make sure light rapidly flashing white



3.Connect devices

STEP1

Open the Smart Life. In the top corner of the Decices screen,click (+) the Home, click“+” and “Add Device”.

STEP2

Choose “Add”

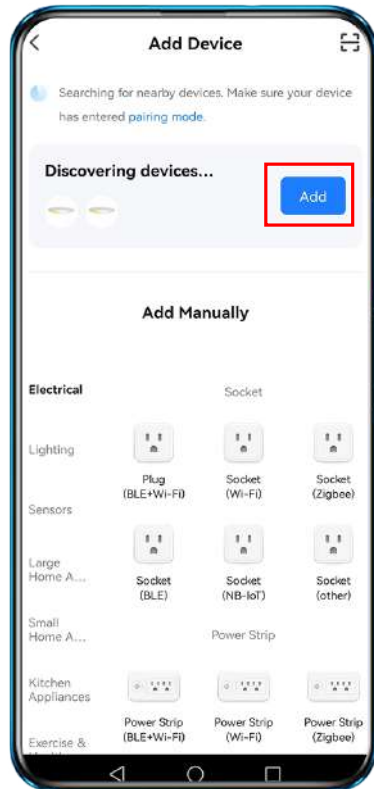
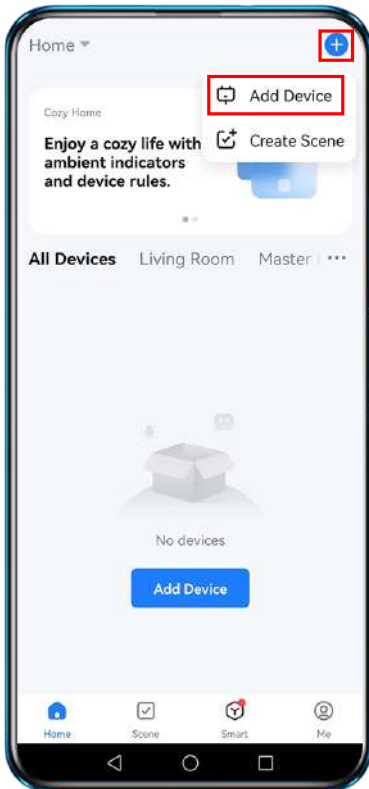


STEP3

Enter your WiFi network and password, press "Next" in the App.

STEP4

Click "+" in front of the fixture and save.

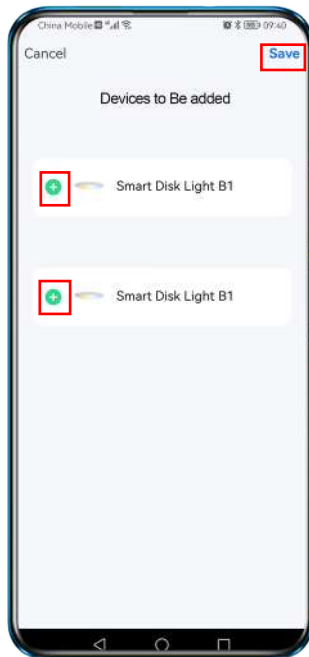
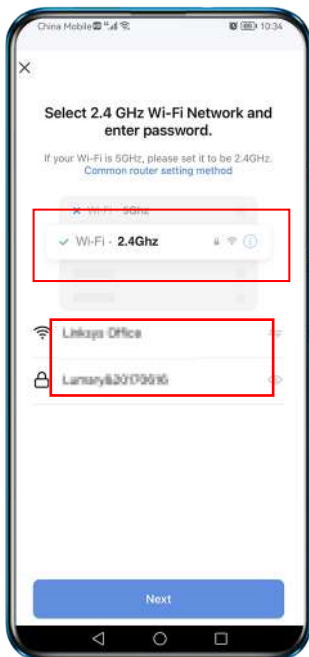


STEP5

"v" in front of the fixture stand for successfully connected and click done.



STEP6

Enter the single fixture to select the color and brightness. Click "..." in the top right to enter the setup interface.

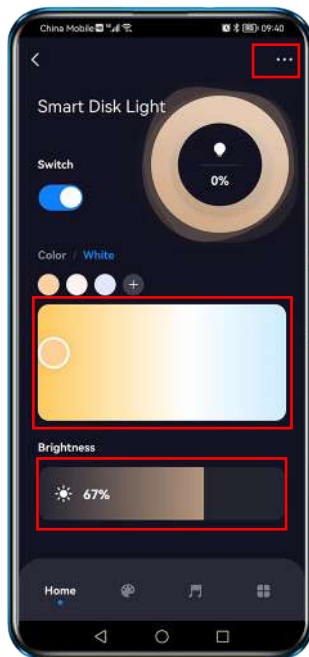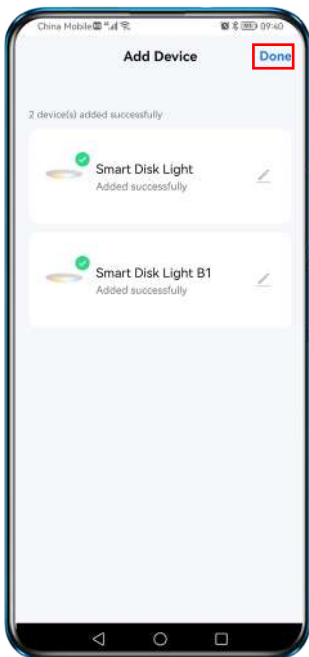



STEP7

Choose "Create Group"

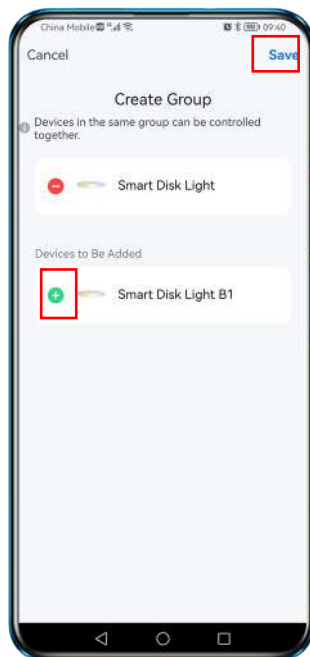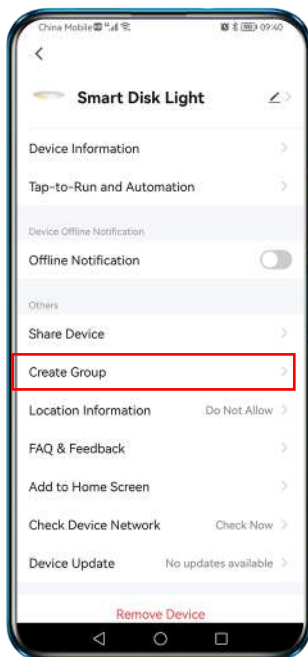

STEP8

Click "+" in front of the fixture to your "Create Group" and save.

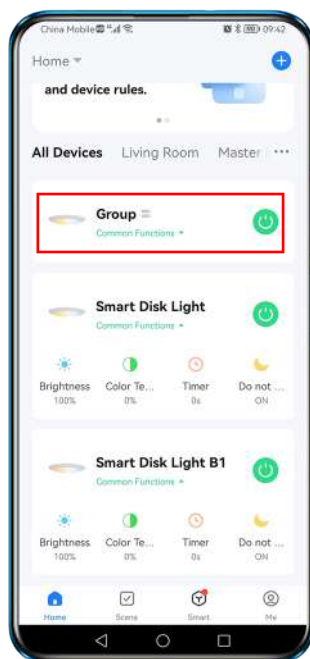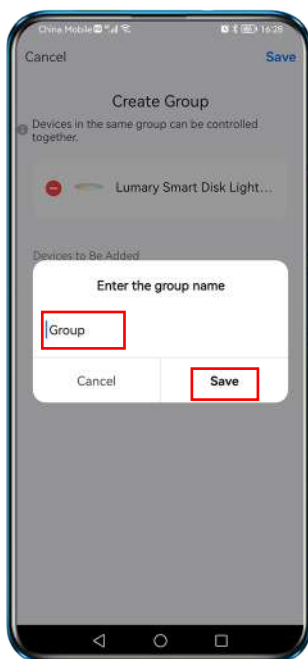

STEP9


Named "Create Group" and save.

STEP10

Click "Group" to enter.


STEP11

Set the color and brightness of Group.

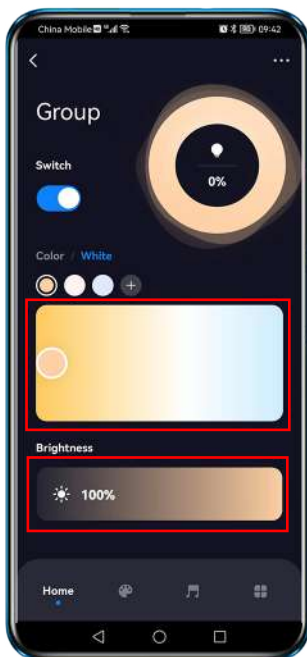


STEP12

Click "Scen" below.

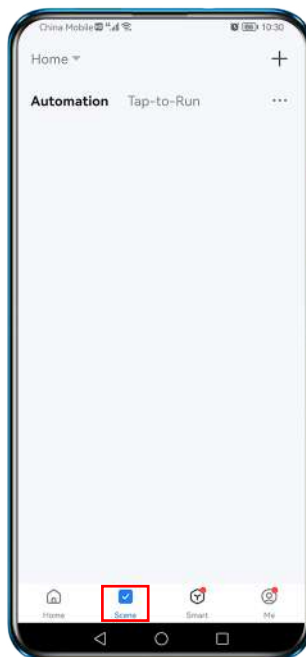


STEP13

Choose "Schedule", enter the timing interface.

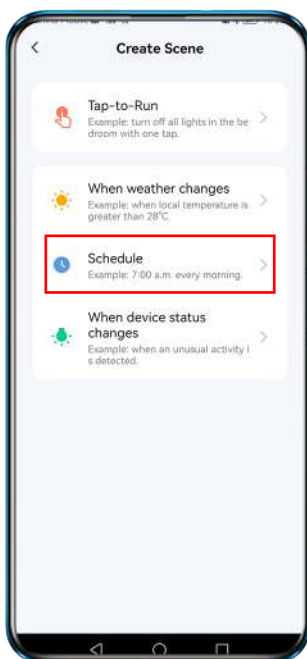

STEP14

Set the ON-OFF time of fixture for your demand.

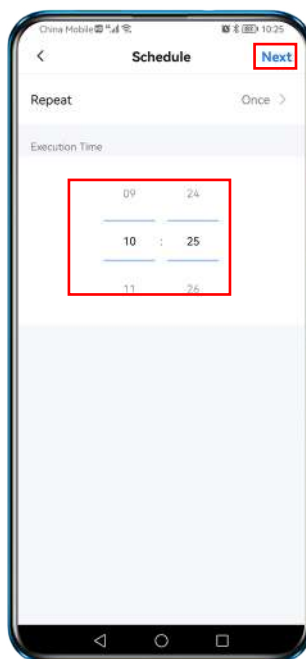

STEP14

Choose time and group.

STEP15

Slide switch to open or close the Automation.

