

Smart Series

Smart Round Slim panel

Project Name: Note: Date: Catalog Number: Type:

DESCRIPTION

phone to easily turn off the lights.















BASED ON SAMPLE SETTING.ACTUAL LUMENS MAY VARY

MODEL#	SIZE	WATTAGE	CCT	MAX LUMENS
4EJCT09SR-S	4inch	9W	6500K	630Lm
6EJCT13SR-S	6inch	13W	6500K	1100Lm

TECHNICAL ODECICIOATION

TECHNICAL SPECIFICATION		
120V	VOLTAGE	
60Hz	POWER FREQUENCY	
>0.9	POWER FACTOR	
RGB+(2700K~6500K)	CCT	
80	CRI	
120°	BEAM ANGLE	
AL+PS	MATERIAL	
≥50,000hours	LIFESPAN	
(-4°F~ 113°F) -20~45℃	OPERATING TEMP	
Triac Dimming	DIMMABLE	
Suitable for Wet Locations	RATING	
5 year limited	WARRANTY	









FEATURES

Download the "Smart Life" or "tuya" APP to connect and enjoy intelligent control. NOTE: Only support 2.4 GHz Wi-Fi.

- 16 million colors availiable.
- Support Bluetooth+WIFI+Voice control.
- · Control the light in groups.
- Timer function, setting lights on/off automatically.
- Multi preset scene modes and DIY scenes to fits any occasions.

INSTALLATION

No existing recessed housing or junction box required. Suitable for most new constructions. Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-1% dimming to choose the desired brightness.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.


ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

FCC.FCC-ID.








Catalog Number: Project Name: Note: Date: Type:

Color: Warm White+Cold White Brightness can be adjusted from 1% to 100%.

Color: RGB Brightness can be adjusted from 1% to 100%.

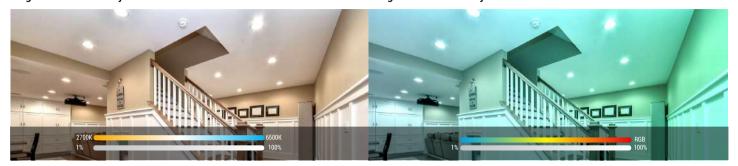


Control the light in groups.

Work with Amazon Alexa / Google Home.




Timer function, setting lights on/off automatically.

Multi preset scene modes and DIY scenes to fits any occasions.

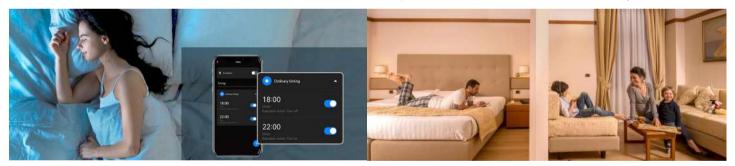

DIMENSION

6inch

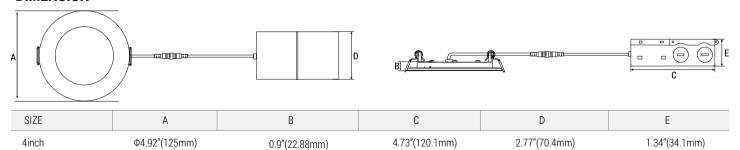

HOLE SIZE & ACCESSORIES

Φ6.69"(175mm)



SIZE	HOLE SIZE)
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

0.9"(22.88mm)



4.73"(120.1mm)

Connector

2.77"(70.4mm)



1.34"(34.1mm)