

## DESCRIPTION

Ultra slim design, lamp thickness only 0.39".  
 Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.  
 Easy Installation, no housing needed.  
 Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.



6"



### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-6EJCT12SR05	6inch	12W	2700K	904Lm
			3000K	926Lm
			3500K	949Lm
			4000K	986Lm
			5000K	971Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-6EJCT12SR05	6inch	15W	2700K	1007Lm
			3000K	1098Lm
			3500K	1184Lm
			4000K	1206Lm
			5000K	1175Lm

## TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K   3000K   3500K   4000K   5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	PS+AL
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F ~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

## FEATURES

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze

## INSTALLATION

No existing recessed housing or junction box required.  
 Suitable for most new constructions.  
 Install J-Box in ceiling beam, and insert light right into drywall opening.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
 Please check the recommended dimmer list in next page.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than halogen lamps.


## LISTING

ETL Listed. Energy Star. Title24.



Catalog Number :      Project Name :      Note :      Date :      Type :


Easily flip the switch for desired CCT

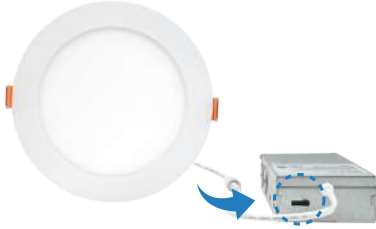

Products view



Beam Angle 120°

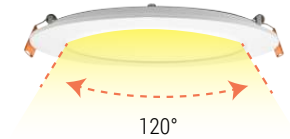

## DIMENSION



## RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06

## TRIM RING REPLACEMENT (SOLD SEPARATELY)

## ACCESSORIES



Brushed nickel



Black




Bronze



J-Box driver



Connector



Hole cutout card  
6 19/64" (160mm)