

5CCT Round Slim Panel

Catalog Number :	Project Name :	Note:	Date:	Туре:



Ultra slim design, lamp thickness only 0.39".

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K 4000K, or 5000K.

Easy Installation, no housing needed.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms

BASED ON SAMPLE SETTING.ACTUAL LUMENS MAY VARY

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-8EJCT18SR05	8inch	18W	2700K 3000K 3500K 4000K 5000K	1442Lm 1488Lm 1504Lm 1474Lm 1409Lm

TECHNICAL SPECIFICATION				
120V	VOLTAGE			
60Hz	POWER FREQUENCY			
>0.9	POWER FACTOR			
2700K 3000K 3500K 4000K 5000K	5CCT			
90	CRI			
120°	BEAM ANGLE			
PS+AL	MATERIAL			
≥50,000hours	LIFESPAN			
(-4°F~ 113°F) -20~45°C	OPERATING TEMP			
Triac Dimming	DIMMABLE			
Suitable for Wet Locations	RATING			
5 year limited	WARRANTY			

FEATURES

- · Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker

•Color removable trim available (sold separately): Brushed nickel, Black, Bronze

8"

INSTALLATION

No existing recessed housing or junction box required. Suitable for most new constructions. Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.




LISTING


ETL Listed. Energy Star.

Round Slim Panel Series IV

5CCT Round Slim Panel

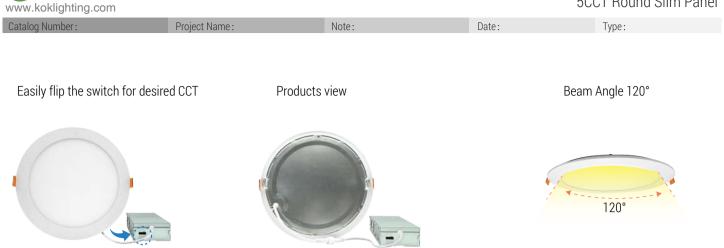

DIMENSION



RECOMMENDED DIMMER

LUTRON			LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-0P153M	6672
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674 RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06 IPL06







