

### DESCRIPTION

Ultra slim design, lamp thickness only 0.49".  
 Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.  
 Easy Installation, no housing needed.  
 Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.  
 Available size: 4", 6"



**BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.**

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-4EJCT09SS05	4inch	9W	2700K	525Lm
			3000K	561Lm
			3500K	587Lm
			4000K	600Lm
			5000K	588Lm
MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-6EJCT12SS05	6inch	12W	2700K	840Lm
			3000K	870Lm
			3500K	886Lm
			4000K	901Lm
			5000K	876Lm

### TECHNICAL SPECIFICATION

VOLTAGE	<b>120V</b>
POWER FREQUENCY	<b>60Hz</b>
POWER FACTOR	<b>&gt;0.9</b>
5CCT	<b>2700K   3000K   3500K   4000K   5000K</b>
CRI	<b>90</b>
BEAM ANGLE	<b>120°</b>
MATERIAL	<b>AL+PS</b>
LIFESPAN	<b>≥50,000hours</b>
OPERATING TEMP	<b>(-4°F ~ 113°F) -20~45 °C</b>
DIMMABLE	<b>Triac Dimming</b>
RATING	<b>Suitable for Wet Locations</b>
WARRANTY	<b>5 year limited</b>

### FEATURES

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker

### INSTALLATION

No existing recessed housing or junction box required.  
 Suitable for most new constructions.  
 Install J-Box in ceiling beam, and insert light right into drywall opening.

### DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
 Please check the recommended dimmer list in next page.

### ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

### ENERGY SAVINGS

80% more energy savings than halogen lamps.

### LISTING

ETL Listed. Energy Star.




**4inch&6inch:** Easily flip the switch for desired CCT


Products view



### DIMENSION & HOLE SIZE

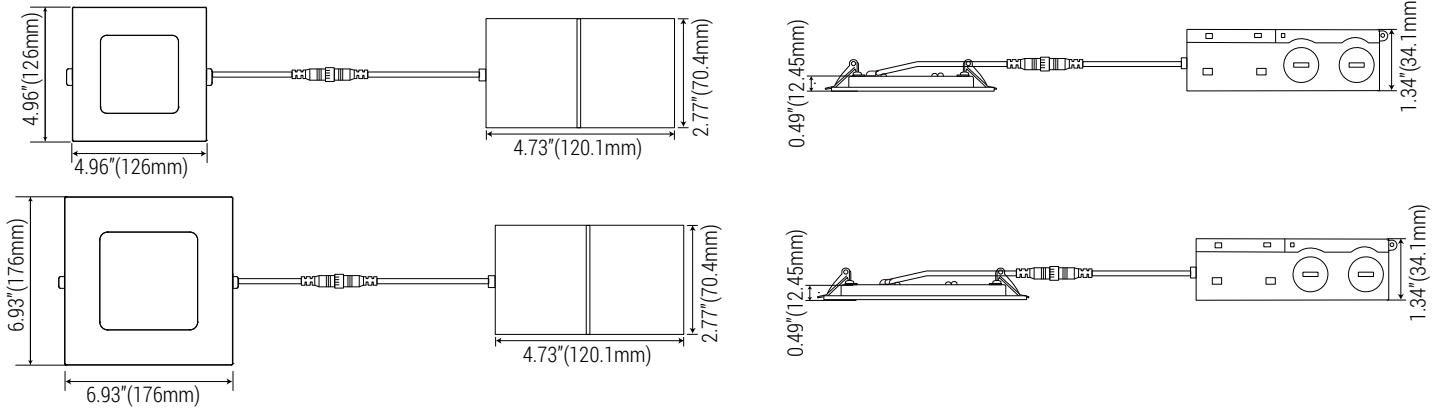

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

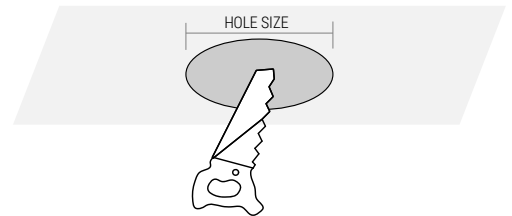

### RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSC-L-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06

### ACCESSORIES

PART	DESCRIPTION	QUANTITY
A	J-Box driver	1
B	Connector	3
C	Hole cutout card	1

