

Catalog Number : Project Name : Note : Date : Type :

DESCRIPTION

Flush Mount, Its design features an a die cast aluminum bordered circumference for a sleek aesthetic.

Suitable for Wet Locations.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
5EJFMCT12SR05	5inch	12W	2700K	652Lm
			3000K	686Lm
			3500K	728Lm
			4000K	710Lm
			5000K	669Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
7EJFMCT15SR05	7inch	15W	2700K	1004Lm
			3000K	1024Lm
			3500K	1046Lm
			4000K	1186Lm
			5000K	1098Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	80/90
BEAM ANGLE	120°
MATERIAL	AL+PS
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45 °C
DIMMING	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

FEATURES

- Emits evenly, without halo and shadow
- Triac dimming 10%-100%
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze

STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 0.5 inch thick, it won't look awkward or affect the decoration. The flat-mounted ceiling lamps have a smooth surface and no bulge, making them suitable for a variety of decorative styles.

SAFETY & LONG LIFESPAN

The shell is made of Die-casting process, protect your house from potential disasters caused by electricity short circuit. Excellent performance of dust proof, easy to clean. Under normal usage of 8 hours per day, the lifespan could endure more than 10 years.

ENERGY SAVINGS

Higher lumens and lower energy consumption, flush mount ceiling light offers higher lumens and lower power, provide a large amount of uniform, no flickering light.

LISTING

ETL Listed.



Catalog Number : Project Name : Note : Date : Type :





Push the switch to select the correct color temperature.



The spring passes through the vacancy in parallel to the direction and position, and the convex point is stuck.



DIMENSION

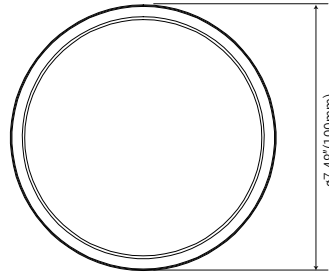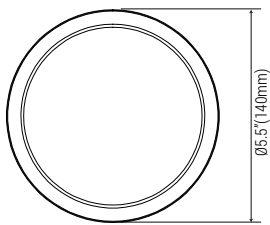

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	IPL06




J-Box driver



Connector




Spring clip



Hole cutout card

SIZE	HOLE SIZE
5inch	4 21/64"(110mm)
7inch	6 19/64"(160mm)

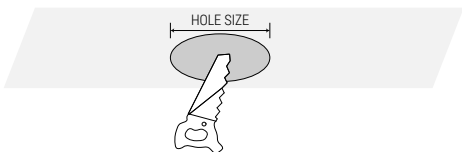

TRIM RING REPLACEMENT (SOLD SEPARATELY)



Brushed nickel



Black



Bronze