

Catalog Number:

Project Name:

Note:

Date:

Type:

DESCRIPTION

A flexible downlight solution supports surface mounting and retrofit installation .
 High quality Iron shell with frosted PC diffuser.
 Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.
 Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.

6"



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

| MODEL# | SIZE | WATTAGE | 5CCT | LUMENS |
|-------------|-------|---------|-------|--------|
| 6HVCT15D5WH | 6inch | 15W | 2700K | 923Lm |
| | | | 3000K | 970Lm |
| | | | 3500K | 1098Lm |
| | | | 4000K | 1126Lm |
| | | | 5000K | 1023Lm |

FEATURES

- Low profile, no flicker
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Provide true color rendering with 90+ CRI

TECHNICAL SPECIFICATION

| | |
|-----------------|--|
| VOLTAGE | 120V |
| POWER FREQUENCY | 60Hz |
| POWER FACTOR | >0.9 |
| 5CCT | 2700K 3000K 3500K 4000K 5000K |
| CRI | 90 |
| BEAM ANGLE | 120° |
| MATERIAL | PC+Iron |
| LIFESPAN | ≥50,000hours |
| OPERATING TEMP | (-4°F~ 113°F) -20~45 C |
| DIMMABLE | Triac Dimming |
| RATING | Suitable for Wet Locations |
| WARRANTY | 5 year limited |

INSTALLATION

With multiple apertures, can be installed into any 5 or 6 inch recessed can, or any 3.5 inch junction box.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.
 Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. Energy Star.



Catalog Number : Project Name : Note : Date : Type :



FLIP THE SWITCH TO CHOOSE DESIRED CCT



PRODUCT VIEW



DIMENSION

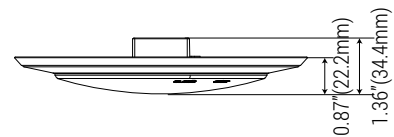

RECOMMENDED DIMMER

| LUTRON | | | | LEVITON | |
|----------------|---------------|--------------|-----------------|---------|-------|
| TG-600PR-WH | TGCL-153PH-LA | SCL-153PH-WH | PD-6WCL | 6672 | |
| S-600PR-WH | SLV-600P-AL | GT-600P | MSCL-OP153M | 6674 | RNL06 |
| CTCL-153PDH-WH | DV-600PR-WH | DVCL-153P | MACL-153M//MA-R | DSL06 | IPL06 |



a



b



c



d

SURFACE MOUNT ACCESSORIES

| PART | DESCRIPTION | QUANTITY |
|------|-------------|----------|
| c | Wire Nuts | 3 |
| d | Screws | 2 |

RETROFIT ACCESSORIES

| PART | DESCRIPTION | QUANTITY |
|------|------------------|----------|
| a | E26 Adapter | 1 |
| b | Mounting Springs | 2 |
| c | Wire Nuts | 3 |