

Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

DESCRIPTION

The lamp has an aluminum white trim and a PC lens, which supports surface installation.

This flush mount panel light is designed for comfortable illumination in office, home, hotels, corridors, shopping malls, schools.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
13FMCT24SR05WH	24W	2700K	1896Lm
		3000K	1996Lm
		3500K	2100Lm
		4000K	2169Lm
		5000K	2103Lm

FEATURES

- Emits evenly, without halo and shadow
- Fit 2.75"/3.5"/4" J-Box
- Ultra-thin design

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	AL+PS
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 0.98 inch thickness. The smooth surface is suitable for a variety of decorative styles.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.



Catalog Number: Project Name: Note: Date: Type:



EASILY FLIP THE SWITCH FOR DESIRED CCT



PRODUCTS VIEW



DIMENSION

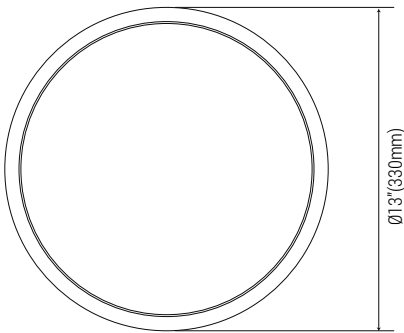

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	IPL06

INSTALLATION ACCESSORIES



Mounting Bracket



Screws



Wire Nuts