

Catalog Number:

Project Name:

Note:

Date:

Type:

DESCRIPTION



- LED split deep regress commercial downlight series are available in 3 different light engine. Each light engine could fitting 6" , 8" , 10" round trims.
- The innovative separable design of junction box and trim makes it more flexible. One engine allows for seamless integration of multiple trim sizes with easy and tool-free installation.
- Easy-fit installation comes from the adjustable butterfly clips. It is designed for recessed application.
- It is suitable for commercial and public places and elegantly decorates the ambience, such as shopping mall, hospital, airport, hotel lobby etc.

FEATURES

- Spun aluminum reflector integrate with haze finish and white trim ring with shadow free.
- Durable tension clips, allow for fast and easy flush installation.
- 0-10V dimmable.
- Available in 3 wattages and 5 CCT tunable.

TECHNICAL SPECIFICATION

VOLTAGE	120-277V
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	AL+PC
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	0-10V dimmable
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

INSTALLATION

Easy assembly, tool-free installation.

ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.



SIZE	TRIM	WATTAGE	LUMEN
SPCM25DR05	DT-6R	15W-20W-25W	1350lm/1850lm/2350lm
	DT-8R		1500lm/2000lm/2500lm
	DT-10R		1600lm/2100lm/2650lm



SIZE	TRIM	WATTAGE	LUMEN
SPCM45DR05	DT-6R	25W-35W-45W	2250lm/3150lm/4050lm
	DT-8R		2350lm/3300lm/4250lm
	DT-10R		2500lm/3500lm/4500lm



SIZE	TRIM	WATTAGE	LUMEN
SPCM65DR05	DT-6R	45W-55W-65W	3850lm/4700lm/5550lm
	DT-8R		4050lm/4950lm/5850lm
	DT-10R		4300lm/5250lm/6150lm



Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------




Selectable CCT & Selectable Wattage

The innovative separable design of junction box and trim makes it more flexible.


Easy-fit installation comes from the adjustable butterfly clips.



DIMENSION

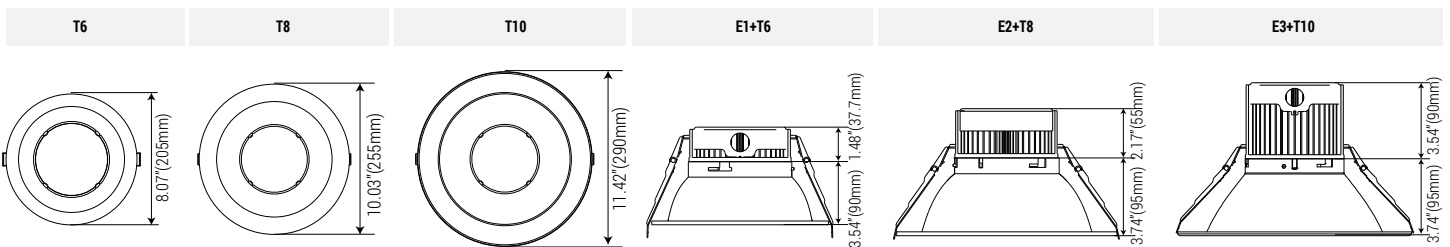

Size	Dimension	Size	Dimension	Size	Dimension
E1+T6	Φ8.07"*H5.02" (205*127.7mm)	E2+T6	Φ8.07"*H5.51" (205*140mm)	E3+T6	Φ8.07"*H6.89" (205*175mm)
E1+T8	Φ10.03"*H5.51" (255*135mm)	E2+T8	Φ10.03"*H5.91" (255*150mm)	E3+T8	Φ10.03"*H7.28" (255*185mm)
E1+T10	Φ11.42"*H6.89" (290*135mm)	E2+T10	Φ11.42"*H5.91" (290*150mm)	E3+T10	Φ11.42"*H7.28" (290*185mm)

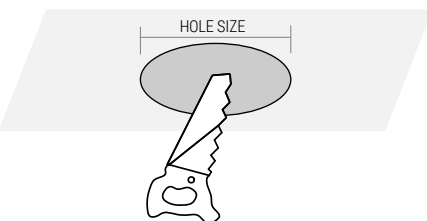

SIZE	HOLE SIZE
6inch	6 19/64" (160mm)
8inch	8 5/64" (205mm)
10inch	8 31/32" (228mm)

RECOMMENDED DIMMER	
LUTRON	LEGRAND
RMJS-8T-DV-B	
Diva DVSTV	
MS-Z101-WH	RH4FBL3PW
DVSTV-WH	