

Catalog Number : Project Name : Note : Date : Type :

DESCRIPTION

This fixture has an integrated junction box, making installation quick and easy.
 Design with a baffle trim.
 Color:2700K-5000K
 Wet-location rated, ideal for retail lighting, commercial lighting, residential lighting, office lighting, kitchen lighting, bathroom lighting, basement lighting.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

| MODEL# | SIZE | WATTAGE | CCT | LUMENS |
|-----------------|-------|---------|-------|--------|
| KOK-4BJ1027LRWH | 4inch | 10W | 2700K | 589Lm |
| KOK-4BJ1030LRWH | | | 3000K | 606Lm |
| KOK-4BJ1040LRWH | | | 4000K | 674Lm |
| KOK-4BJ1050LRWH | | | 5000K | 621Lm |

| MODEL# | SIZE | WATTAGE | CCT | LUMENS |
|-----------------|-------|---------|-------|--------|
| KOK-6BJ1527LRWH | 6inch | 15W | 2700K | 996Lm |
| KOK-6BJ1530LRWH | | | 3000K | 1002Lm |
| KOK-6BJ1540LRWH | | | 4000K | 1121Lm |
| KOK-6BJ1550LRWH | | | 5000K | 1043Lm |

TECHNICAL SPECIFICATION

| | |
|-----------------|---|
| VOLTAGE | 120V |
| POWER FREQUENCY | 60Hz |
| POWER FACTOR | >0.9/0.7 |
| CCT | 2700K or 3000K or 4000K or 5000K |
| CRI | 90 |
| BEAM ANGLE | 100° |
| MATERIAL | PC+AL |
| LIFESPAN | ≥50,000hours |
| OPERATING TEMP | (-4°F~ 113°F) -20~45 °C |
| DIMMABLE | Triac Dimming |
| RATING | Suitable for Wet Locations |
| WARRANTY | 5 year limited |

FEATURES

- Retrofits in existing incandescent can housing
- Suitable for Wet Locations
- IC rated for safe contact with insulation
- 90+ CRI - Superior color rendering performance

INSTALLATION

No existing recessed housing or junction box required.
 Suitable for most new constructions.
 Simply connect the junction box wiring on the back of the recessed downlight to your light switch and place it into your ceiling.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.
 Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. Energy Star.




Catalog Number: Project Name: Note: Date: Type:

Products view




SIZE & DIMENSION

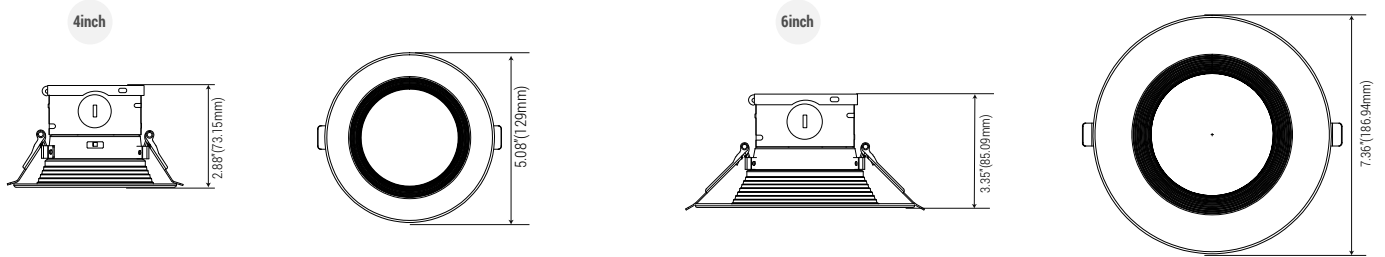

RECOMMENDED DIMMER

| LUTRON | | | | LEVITON | |
|----------------|---------------|--------------|-----------------|---------|-------|
| TG-600PR-WH | TGCL-153PH-LA | SCL-153PH-WH | PD-6WCL | 6672 | |
| S-600PR-WH | SLV-600P-AL | GT-600P | MSCL-OP153M | 6674 | RNL06 |
| CTCL-153PDH-WH | DV-600PR-WH | DVCL-153P | MACL-153M//MA-R | DSL06 | IPL06 |


HOLE SIZE & ACCESSORIES



| SIZE | HOLE SIZE |
|-------|-----------------|
| 4inch | 4 21/64"(110mm) |
| 6inch | 6 19/64"(160mm) |



Wire nuts



Hole cutout card