

DESCRIPTION

This fixture has an integrated junction box, making installation quick and easy.
Design with a baffle trim.
Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.
Wet-location rated, ideal for retail lighting, commercial lighting, residential lighting, office lighting, kitchen lighting, bathroom lighting, basement lighting.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
4BJCT10LRWH	10W	2700K	689Lm
		3000K	753Lm
		3500K	837Lm
		4000K	820Lm
		5000K	794Lm

MODEL#	WATTAGE	5CCT	LUMENS
6BJCT15LRWH	15W	2700K	932Lm
		3000K	1004Lm
		3500K	1135Lm
		4000K	1103Lm
		5000K	1028Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	PC+AL
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

FEATURES

- Retrofits in existing incandescent can housing
- Suitable for Wet Locations
- IC rated for safe contact with insulation
- 90+ CRI, superior color rendering performance

INSTALLATION

No existing recessed housing or junction box required.
Suitable for most new constructions.
Simply connect the junction box wiring on the back of the recessed downlight to your light switch and place it into your ceiling.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.
Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING


ETL Listed. Energy Star. Title24.




Catalog Number : Project Name : Note : Date : Type :

Selectable CCT: 2700K,3000K,3500K,4000K,5000K

Products view

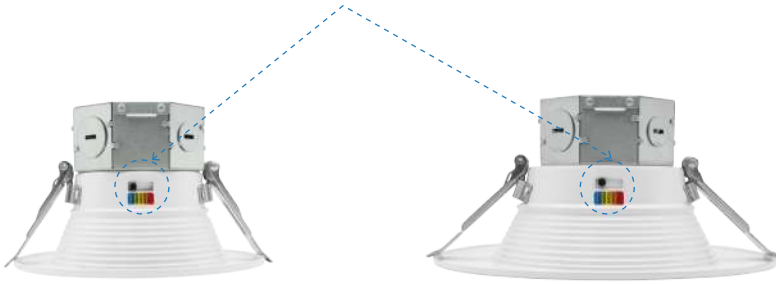


SIZE & DIMENSION

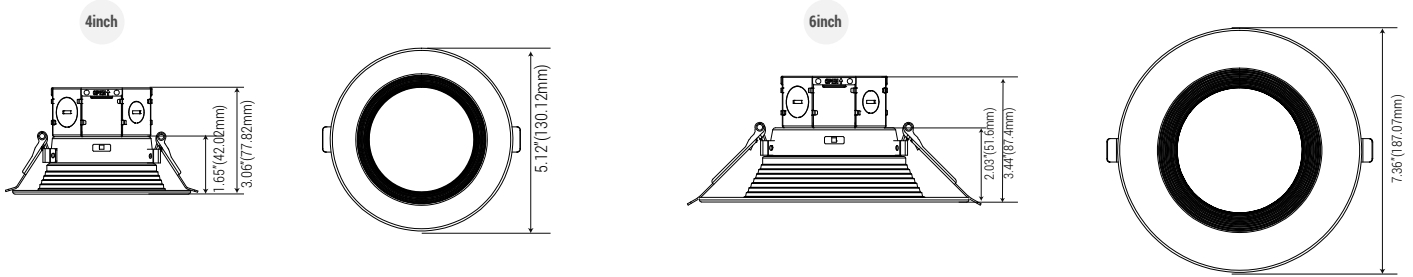

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	IPL06


HOLE SIZE & ACCESSORIES



SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)



Wire nuts



Hole cutout card