


Catalog Number: \_\_\_\_\_ Project Name: \_\_\_\_\_ Note: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_

### DESCRIPTION

Ultra-thin design, light thickness only 1.2", spring loaded retention arms allow for easy installation into ceilings with no need for a recessed housing.

Rated IC, by design of lamp tilt Angle, highlight specific areas. Fixture color temperature range from 2700-5000K. Meet your different needs in the hallway, living room, kitchen, bedroom and even walk-in closet.

Available sizes : 4", 6"

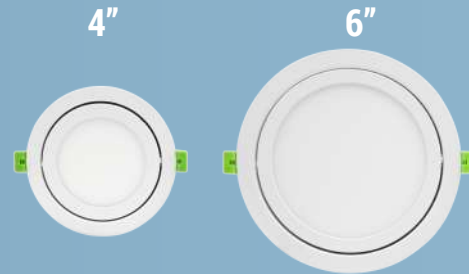

#### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
4EJCT09SR05-G	4inch	9W	2700K	630Lm
			3000K	673Lm
			3500K	693Lm
			4000K	707Lm
			5000K	668Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
6EJCT12SR05-G	6inch	12W	2700K	959Lm
			3000K	1021Lm
			3500K	1057Lm
			4000K	1055Lm
			5000K	998Lm

### TECHNICAL SPECIFICATION

VOLTAGE	<b>120V</b>
POWER FREQUENCY	<b>60Hz</b>
POWER FACTOR	<b>&gt;0.9</b>
5CCT	<b>2700K   3000K   3500K   4000K   5000K</b>
CRI	<b>90</b>
BEAM ANGLE	<b>120°</b>
MATERIAL	<b>AL+PS</b>
LIFESPAN	<b>≥50,000hours</b>
OPERATING TEMP	<b>(-4°F ~ 113°F) -20~45 °C</b>
DIMMING	<b>Triac Dimming</b>
RATING	<b>Suitable for Wet Locations</b>
WARRANTY	<b>5 year limited</b>



### FEATURES

- Fully enclosed aluminum housing
- Easy to install, no housing required
- Edge lit technology allows for extremely thin fixture depth

### INSTALLATION

No existing recessed housing or junction box required.  
Suitable for most new constructions.  
Install J-Box in ceiling beam, and insert light right into drywall opening.

### DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
Please check the recommended dimmer list in next page.

### ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

### ENERGY SAVINGS


80% more energy savings than halogen lamps.

### LISTING

ETL Listed.

Catalog Number:      Project Name:      Note:      Date:      Type:

Beam Angle 120°



Can be tilt adjusted ±10° from the horizontal position.




Easily flip the switch for desired CCT



### DIMENSION

Size	A	B	C	D	E
4inch	Φ5.2"(132mm)	1.2"(30.7mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ7.36"(187mm)	1.2"(30.7mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

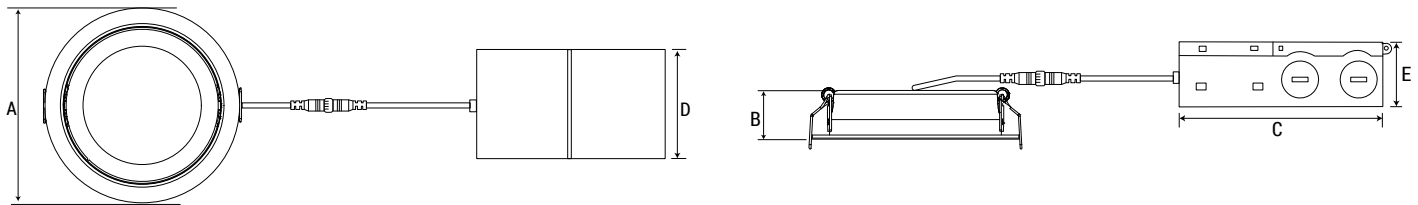


### RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	IPL06

### HOLE SIZE & ACCESSORIES


Size	Hole Size
4inch	4 39/64"(117mm)
6inch	6 1/2"(165mm)



J-Box driver



Connector



Hole cutout card