

Ceiling Light Series III

5CCT Trimless Flush Mount

Catalog Number :	Project Name :	Note:	Date:	Type:	
	Project name :	Note:	Date:	rype:	
DESCRIPTION Ultra slim structure, only 1.1" t Super easier installation. Ultra-thin trim design. 5 adjustable color temperature It is suitable for office, family, h		5" •rs, schools, books and	7 " other places.	9" 50 12	7

BASED ON SA	MPLE SETTIN	IG.ACTUAL L	UMENS.	MAY	VARY

MODEL	SIZE	WATTAGE	5CCT	LUMENS
5FMCT10TRBK	5inch	10W	2700K 3000K 3500K 4000K 5000K	623Lm 631Lm 646Lm 651Lm 638Lm
MODEL	SIZE	WATTAGE	5CCT	LUMENS
7FMCT15TRBK	7inch	15W	2700K 3000K 3500K 4000K 5000K	1004Lm 1028Lm 1051Lm 1062Lm 1043Lm
	0.77			
MODEL	SIZE	WATTAGE	5CCT	LUMENS
9FMCT18TRBK	9inch	18W	2700K 3000K 3500K 4000K 5000K	1201Lm 1216Lm 1240Lm 1263Lm 1236Lm

TECHNICAL SPECIFICATION				
VOLTAGE	120V			
POWER FREQUENCY	60Hz			
POWER FACTOR	>0.9			
5CCT	2700K 3000K 3500K 4000K 5000K			
CRI	90			
BEAM ANGLE	120°			
MATERIAL	AL+PC			
FINISH	Black			
LIFESPAN	≥50,000hours			
OPERATING TEMP	(-4°F~ 113°F) -20~45°C			
DIMMING	Triac Dimmable			
RATING	Suitable for Wet Locations			
WARRANTY	5 year limited			



FEATURES

- · Emits evenly, without halo and shadow;
- Fit 2.75 or 3.5 inch J-Box;
- Support suface mount;

STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 1.1 inch thickness. The smooth surface is suitable for a variety of decorative styles.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING


ETL Listed.



Ceiling Light Series III 5CCT Trimless Flush Mount

5 5 5			0001	
Catalog Number:	Project Name :	Note:	Date:	Type:
Ultra-thin trim design		ith multiple apertures, can be 75 or 3.5inch junction box.	Color temperature	e optional 2700K-5000K
		2.75" Junction Box installation hole 3.5" Junction Box installation hole		

DIMENSION

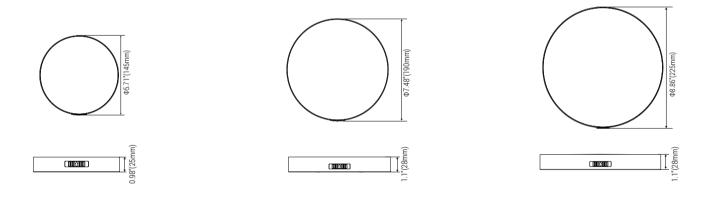

ACCESSORIES





RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL	6672 6674 DSL06	RNL06 IPL06