

Catalog Number : _____ Project Name : _____ Note : _____ Date : _____ Type : _____

DESCRIPTION

It has a classic, low-profile design which allowing users to have a stylish look with efficient lighting. Can be install into any indoor 4"/5"/6" housing.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

3 levels of adjustable wattage.

Damp-location rated, ideal for residential housings, hotels, corridors, home decoration, shopping malls, schools.

Available size: 4", 6"



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL	WATTAGE	5CCT	LUMENS
KOK-4HVCTLR05WH	6W-8W-10W	2700K	402lm-536lm-674lm
		3000K	408lm-544lm-683lm
		3500K	414lm-552lm-690lm
		4000K	423lm-591lm-722lm
		5000K	412lm-548lm-688lm

MODEL	WATTAGE	5CCT	LUMENS
KOK-6HVCTLR05WH	9W-12W-15W	2700K	608lm-804lm-1005lm
		3000K	408lm-816lm-1020lm
		3500K	639lm-852lm-1065lm
		4000K	648lm-865lm-1080lm
		5000K	631lm-842lm-1054lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	PC+AL
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

FEATURES

- Retrofits in existing incandescent can housing
- E26 screw base adapter connects directly to standard socket
- 90+ CRI, superior color rendering performance

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

INSTALLATION

Easy installation with universal E26 connectors. Fit 4", 5" and 6" compatible housings.

LIFESPAN


This luminaire is built with the highest quality 120V drivers, ensuring energy efficiency. With a lifespan of 50,000 hours, it can last decades under normal operation!

LISTING


ETL Listed.



Catalog Number: Project Name: Note: Date: Type:

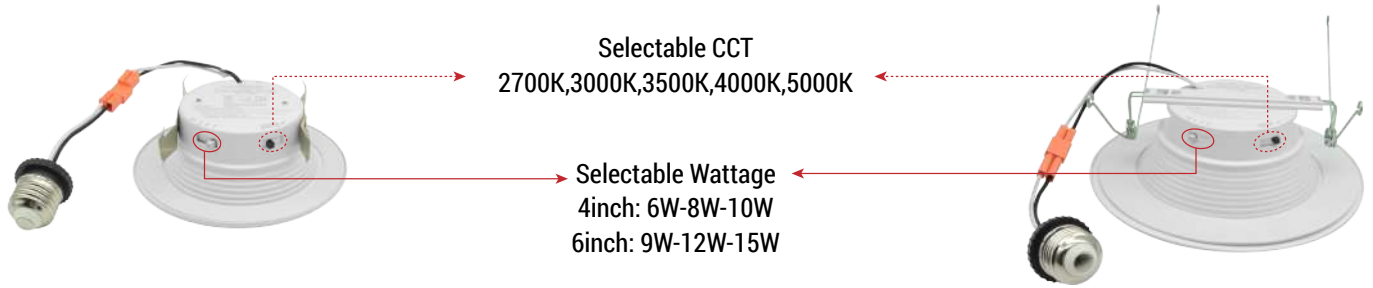

SIZE & DIMENSION

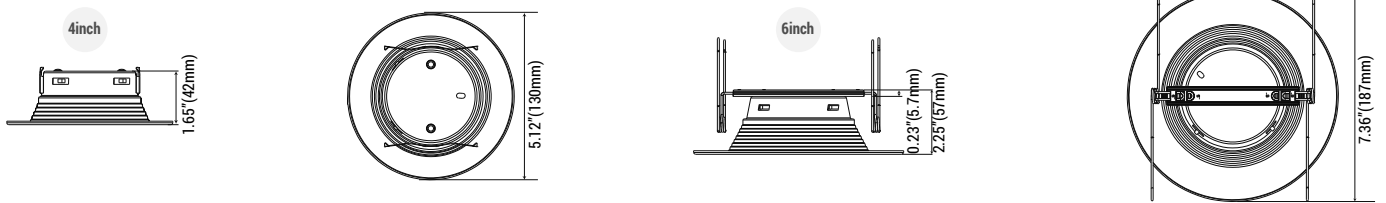

RECOMMENDED DIMMER

LUTRON		LEVITON
TG-600PR-WH	SCL-153PH-WH	6672
S-600PR-WH	GT-600P	6674
CTCL-153PDH-WH	DVCL-153P	DSL06
TGCL-153PH-LA	PD-6WCL	RNL06
SLV-600P-AL	MSCL-OP153M	IPL06
DV-600PR-WH	MACL-153M//MA-R	

ACCESSORIES



E26 Adapter