

Catalog Number:      Project Name:      Note:      Date:      Type:

### DESCRIPTION

The lamp has a modern design, with a brushed iron nickel plating double ring design and a white frosted acrylic diffuser, perfect solution for commercial applications.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Available in 12", 14" and 16".

Suitable for residential housings, condominiums, business building, hotel and hospitality industry.



**BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.**

MODEL#	WATTAGE	5CCT	LUMENS
12FMCT16DR05BN	16W	2700K	1136Lm
		3000K	1152Lm
		3500K	1192Lm
		4000K	1206Lm
		5000K	1168Lm

MODEL#	WATTAGE	5CCT	LUMENS
14FMCT20DR05BN	20W	2700K	1441Lm
		3000K	1453Lm
		3500K	1480Lm
		4000K	1509Lm
		5000K	1466Lm

MODEL#	WATTAGE	5CCT	LUMENS
16FMCT24DR05BN	24W	2700K	1741Lm
		3000K	1772Lm
		3500K	1796Lm
		4000K	1820Lm
		5000K	1805Lm

### FEATURES

- Emits evenly, without halo and shadow
- Fit 3.5"/4" J-Box
- Easy to install

### DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

### ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

### ENERGY SAVINGS

80% more energy savings than halogen lamps.

### LISTING

ETL Listed.

### TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K   3000K   3500K   4000K   5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	Iron+PC
FINISH	Brushed Nickel
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited



Catalog Number:      Project Name:      Note:      Date:      Type:

### EASILY FLIP THE SWITCH FOR DESIRED CCT



### PRODUCTS VIEW



### SURFACE MOUNTING INSTALLATION

**1.** Remove the bolt



**2.** Connect the wire, screw on the screw



**3.** Install the lampshade



**4.** Install the frame






**5.** Turn on the lights



**6.** Turn off the lights



### DIMENSION

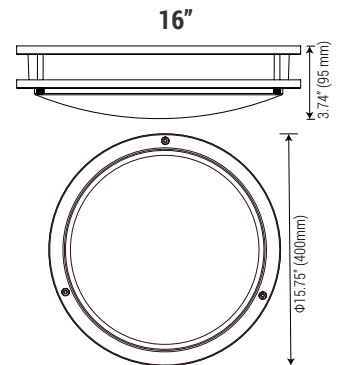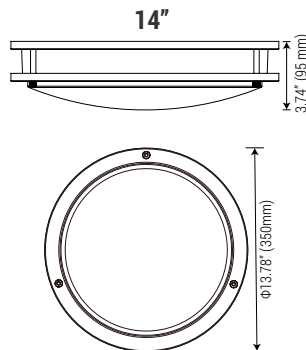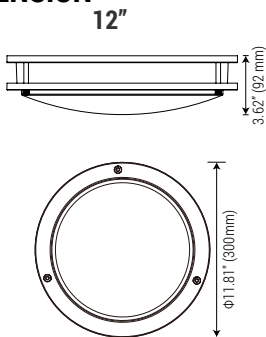

### RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06