

Catalog Number: _____ Project Name: _____ Note: _____ Date: _____ Type: _____


DESCRIPTION

Adopt integrated design, unique Aluminum heat dissipation structure, improve heat dissipation efficiency effectively prolong service life.

Built-in COB chip, good color display and high brightness.

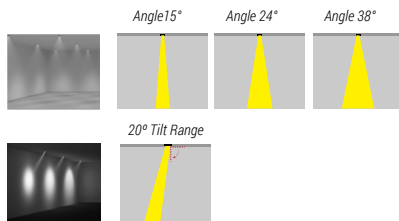
With adjustable colors, 360° rotation, 20° tilt, and narrow beam angles of 15°, 24°, 38° to highlight architectural or artistic elements in your home.

Ideal for boLiving room, bedroom, kitchen, washroom, school, university, hospital, hotel, conference, meeting room, show room, showcase;



FEATURES

- Professional optical lens, uniform light
- Powder coated surface treatment is durable and not easy to fall off
- Excellent aluminum reflector offers even and better light color, bringing visual comfort
- Tilting gimbal light source for directional lighting



INSTALLATION

No existing recessed housing or junction box required.
Suitable for most new constructions.
Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.
Please check the recommended dimmer list in next page.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	15°/24°/38°
MATERIAL	AL+PC
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited



MODEL	WATTAGE	LUMEN
2EGCT09GWBRT	9W	630lm



MODEL	WATTAGE	LUMEN
3EGCT12GWBRT	12W	860lm



MODEL	WATTAGE	LUMEN
4EGCT18GWBRT	18W	1260lm



Catalog Number : Project Name : Note : Date : Type :

360° Rotation



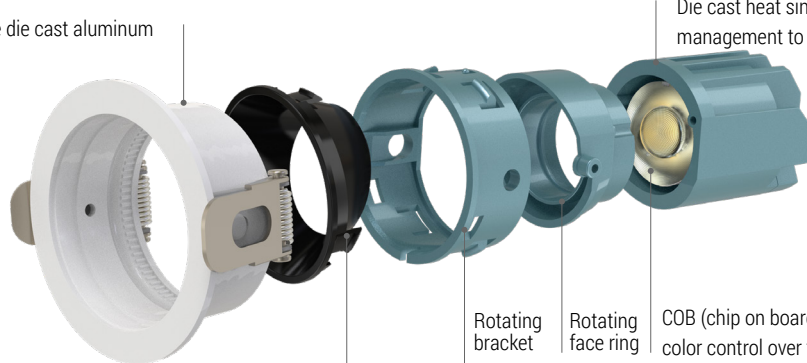
20° Tilt Range



Narrow light angle optional: 15°, 24°, 38°



Finishing section trims are durable die cast aluminum with precision painted finish.












Die cast heat sinks provide optimized passive thermal management to maximize LED lumen maintenance.

Reflector
It is suitable for small narrow light, narrow light, large narrow light.

Rotating bracket Rotating face ring COB (chip on board) provides long useful life with precise color control over time.

The precise rotating bracket is placed on the rotating surface ring, allowing the lamp body to rotate 360 degrees and tilt at an angle

Size	Dimension		Power	Hole Cutout
2inch			9W	
3inch			12W	
4inch			18W	

RECOMMENDED DIMMER

LUTRON			LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	DSL06	IPL06
		MSCL-OP153M		
		MACL-153M//MA-R		
		PD-6WCL		