



Catalog Number: _____ Project Name: _____ Note: _____ Date: _____ Type: _____

DESCRIPTION

With color adjustable and features 355° rotation, 90° tilt, and a narrow 36° beam angle to highlight architectural or artistic elements in your home.

Suitable for Wet Location.

Ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

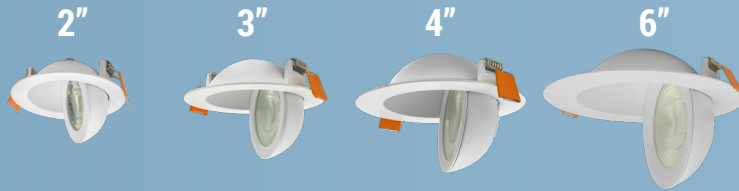

BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
2EJCT05GRWH	2inch	5W	2700K	376Lm
			3000K	388Lm
			3500K	395Lm
			4000K	403Lm
			5000K	390Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
3EJCT06GRWH	3inch	6W	2700K	467Lm
			3000K	500Lm
			3500K	518Lm
			4000K	519Lm
			5000K	488Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
4EJCT09GRWH	4inch	9W	2700K	765Lm
			3000K	792Lm
			3500K	806Lm
			4000K	812Lm
			5000K	801Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
6EJCT12GRWH	6inch	12W	2700K	1026Lm
			3000K	1032Lm
			3500K	1044Lm
			4000K	1081Lm
			5000K	1053Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	36°
MATERIAL	AL+lens
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F ~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited



FEATURES

- Aluminum die-cast body with adjustable gimbal
- Spring loaded retention arms allow for easy installation into ceilings
- Tilting gimbal light source for directional lighting

INSTALLATION

No existing recessed housing or junction box required.
 Suitable for most new constructions.
 Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.
 Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.


LISTING

ETL Listed.

















COLOR OPTIONS

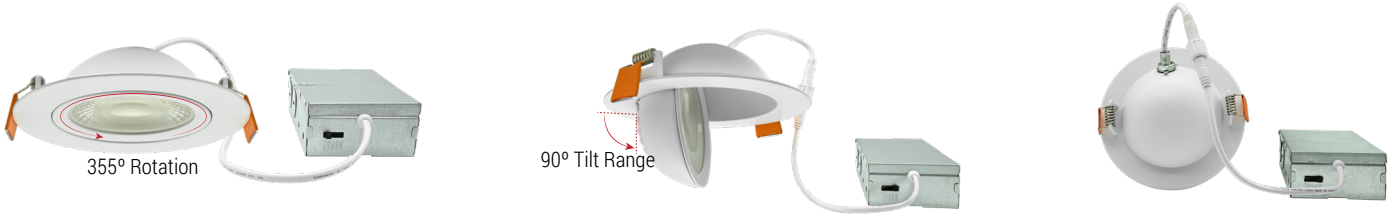

Catalog Number: Project Name: Note: Date: Type:



SIZE & DIMENSION & HOLE SIZE

SIZE	DIMENSION			HOLE SIZE
2inch				
3inch				
4inch				
6inch				

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06


ACCESSORIES



J-Box driver



Connector



Hole cutout card