

Catalog Number:      Project Name:      Note:      Date:      Type:

## DESCRIPTION

Ultra slim structure, only 1.1" thickness.  
 Super easier installation.  
 Ultra-thin trim design.  
 5 adjustable color temperature;  
 It is suitable for office, family, hotels, corridors, shopping centers, schools, books and other places.



### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

| MODEL               | SIZE  | WATTAGE | 5CCT  | LUMENS |
|---------------------|-------|---------|-------|--------|
| CL03-05-10-UC5-D-BK | 5inch | 10W     | 2700K | 707lm  |
|                     |       |         | 3000K | 731lm  |
|                     |       |         | 3500K | 778lm  |
|                     |       |         | 4000K | 791lm  |
|                     |       |         | 5000K | 759lm  |


| MODEL               | SIZE  | WATTAGE | 5CCT  | LUMENS |
|---------------------|-------|---------|-------|--------|
| CL03-07-15-UC5-D-BK | 7inch | 15W     | 2700K | 1065lm |
|                     |       |         | 3000K | 1095lm |
|                     |       |         | 3500K | 1142lm |
|                     |       |         | 4000K | 1185lm |
|                     |       |         | 5000K | 1124lm |

| MODEL               | SIZE  | WATTAGE | 5CCT  | LUMENS |
|---------------------|-------|---------|-------|--------|
| CL03-09-18-UC5-D-BK | 9inch | 18W     | 2700K | 1422lm |
|                     |       |         | 3000K | 1440lm |
|                     |       |         | 3500K | 1494lm |
|                     |       |         | 4000K | 1512lm |
|                     |       |         | 5000K | 1458lm |

## FEATURES

- Emits evenly, without halo and shadow;
- Fit 2.75 or 3.5 inch J-Box;
- Support surface mount;

## COLOR OPTIONAL



## TECHNICAL SPECIFICATION

|                 |  |
|-----------------|--|
| VOLTAGE         | <b>120V</b>                                  |
| POWER FREQUENCY | <b>60Hz</b>                                  |
| POWER FACTOR    | <b>&gt;0.9</b>                               |
| 5CCT            | <b>2700K   3000K   3500K   4000K   5000K</b> |
| CRI             | <b>90</b>                                    |
| BEAM ANGLE      | <b>120°</b>                                  |
| MATERIAL        | <b>AL+PC</b>                                 |
| FINISH          | <b>Black/White</b>                           |
| LIFESPAN        | <b>≥50,000hours</b>                          |
| OPERATING TEMP  | <b>(-4°F~ 113°F) -20~45°C</b>                |
| DIMMING         | <b>Triac Dimmable</b>                        |
| RATING          | <b>Suitable for Wet Locations</b>            |
| WARRANTY        | <b>5 year limited</b>                        |

## STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 1.1 inch thickness.  
 The smooth surface is suitable for a variety of decorative styles.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
 Please check the recommended dimmer list in next page.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than halogen lamps.


## LISTING

ETL Listed.




Catalog Number :      Project Name :      Note :      Date :      Type :

Ultra-thin trim design






Mounting bracket, with multiple apertures, can be installed into any 2.75 or 3.5inch junction box.



Color temperature optional 2700K-5000K



### DIMENSION

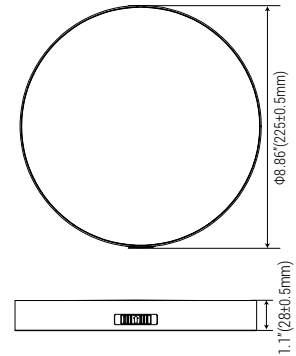

### ACCESSORIES



Wire Nuts



Screws

### RECOMMENDED DIMMER

| LUTRON         |             |             |            | LEVITON |       |
|----------------|-------------|-------------|------------|---------|-------|
| TG-600PR-WH    | SLV-600P-AL | CT-103PR-WH | RCL-153RNL | 6672    | RNLO6 |
| CTCL-153PDH-WH | DVCL-153P   | DVWCL-153PH | CTCL-150H  |         |       |
| TGCL-153PH-LA  | S2-LFSQH-WH |             |            |         |       |