

DESCRIPTION

The round floating gimbal with night light is a fixture with modern technology, and also have night Light function .

With color adjustable and features 355° rotation, 90° tilt, and 120° beam angle. It is suitable for bedrooms, kitchens, hallways ,etc.



4"



6"



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	MAIN LIGHT WATTAGE	LUMEN	BACK LIGHT WATTAGE
4EJCT09GR05-N	9W	630lm	3W

MODEL#	MAIN LIGHT WATTAGE	LUMEN	BACK LIGHT WATTAGE
6EJCT12GR05-N	12W	1000lm	3W

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
MAIN LIGHT CCT	2700K 3000K 3500K 4000K 5000K
NIGHT LIGHT CCT	2000K
CRI	90
BEAM ANGLE	100°
MATERIAL	AL+PS
COLOR	White
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

FEATURES

- Soft amber hue when night light mode activated
- Without recessed cans or a separate j-box
- CRI 90 for true color rendering

INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS



80% more energy savings than halogen lamps.



LISTING

ETL Listed.

Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

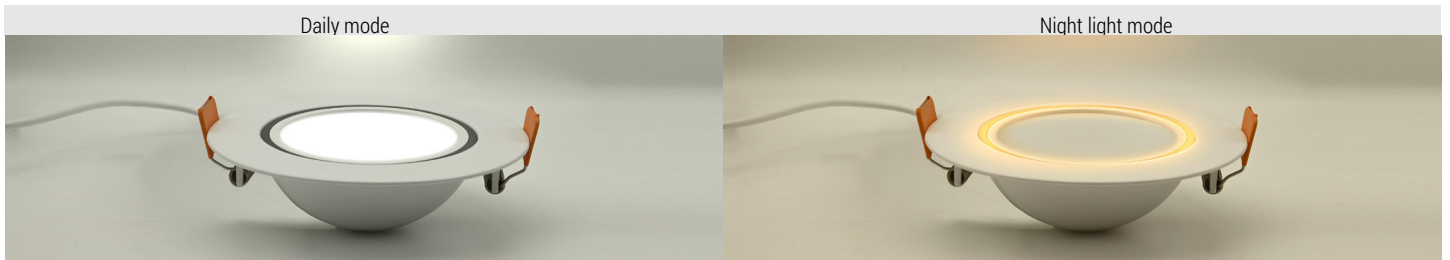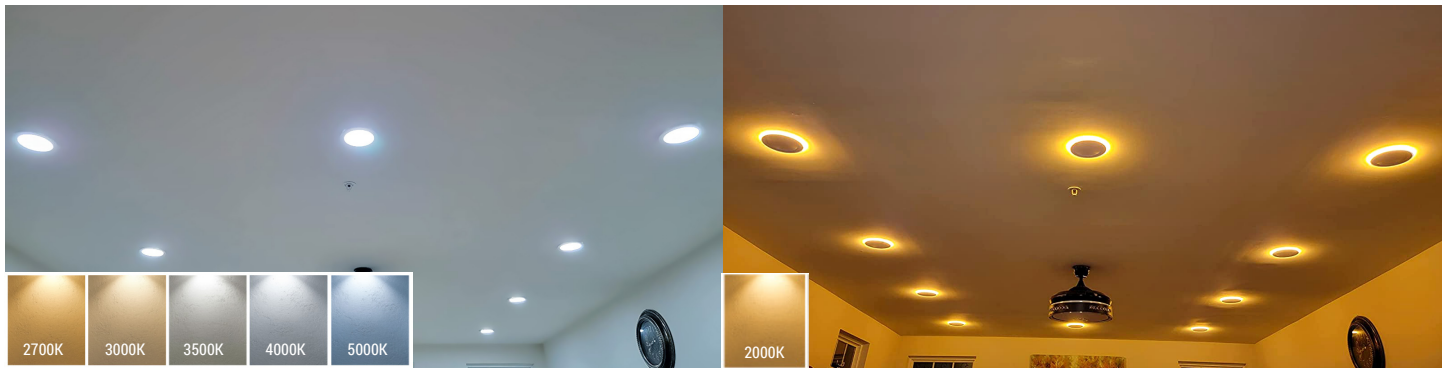

1.SELECTING MAIN LIGHT MODE OR NIGHT LIGHT MODE

The product has two modes: main light mode and night light mode.

Main light mode provides full brightness and allows selection from five color temperatures: 2700K, 3000K, 3500K, 4000K and 5000K.

Night light mode provides reduced light output at 2000K color temperature for very soft illumination at night.

2.CONVENIENT CONTROL USING LIGHT SWITCH

Every time when you turn on the downlight, it will always been main light mode.

Switch the downlight off and back on again within (1-4) seconds to activate night light mode.

NOTE: The main downlight will not provide light output when the night light trim is illuminated.

SIZE & DIMENSION & HOLE SIZE & ACCESSORIES

SIZE	DIMENSION		HOLE CUTOUT	ACCESSORIES
4inch				
6inch				

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	RNL06
S-600PR-WH	SLV-600P-AL	DVCL-153P	MACL-153M//MA-R	6674	IPL06
CTCL-153PDH-WH	DV-600PR-WH				