

Catalog Number:

Project Name:

Note:

Date:

Type:

Description

Integrated commercial-grade downlight with aluminum housing. Adjustable color temperature and wattage, continuously adjustable from 0% to 100%, precisely matching diverse lighting scenarios.

Wet-location and IC rated, ideal use for Residential and Multi-Family, Office, Hallways, and Meeting Rooms, Education Healthcare, Retail, and Hospitality, and Commercial Lighting.



Based on sample setting. Actual lumens may vary.

Model#	Size	Wattage	CCT	Lumens
CD10-04-13-LS5C5-D0	4inch	7-10-13W	2700K	645-910-1180lm
			3000K	670-945-1230lm
			3500K	685-975-1280lm
			4000K	695-990-1320lm
			5000K	705-995-1325lm
CD10-06-22-LS5C5-D0	6inch	12-14-16-18-22W	2700K	1110-1275-1415-1660-1800lm
			3000K	1155-1330-1480-1735-1885lm
			3500K	1205-1390-1555-1825-1990lm
			4000K	1230-1420-1590-1870-2040lm
			5000K	1240-1425-1580-1850-2015lm
CD10-08-30-LS5C5-D0	8inch	14-18-22-26-30W	2700K	1270-1560-1980-2265-2575lm
			3000K	1315-1620-2060-2375-2705lm
			3500K	1370-1700-2170-2520-2875lm
			4000K	1400-1740-2230-2585-2960lm
			5000K	1425-1755-2225-2560-2940lm
CD10-10-40-LS5C5-D0	10inch	20-25-30-35-40W	2700K	1785-2160-2510-2970-3300lm
			3000K	1890-2300-2680-3185-3550lm
			3500K	1975-2410-2820-3360-3760lm
			4000K	2010-2455-2870-3420-3835lm
			5000K	2045-2580-2880-3410-3830lm

Technical Specification

Voltage	120-277V
Power Frequency	50/60Hz
Power Factor	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
Beam Angle	100°
Material	AL+PC
Color	White
Lifespan	≥50,000hours
Operating Temp	(-4°F~ 113°F) -20~45°C
Dimmable	0-10V Dimming
Rating	Suitable for Wet Locations
Warranty	5 year limited

Features

High luminous efficacy, up to 100LM/W

High quality Aluminium shell with frosted PC diffuser

Dimming

Supports 0-10V dimming from 100% to 0%.

Installation

Easy fit installation, spring-action housing clips.

Suitable for most new constructions.

Electrical

This fixture is built with the highest quality drivers, ensuring energy efficiency.

Listing


ETL Listed. Energy Star. Title24.



Catalog Number: Project Name: Note: Date: Type:


Selectable wattage

4inch: 7-10-13W
6inch: 12-14-16-18-22W
8inch: 14-18-22-26-30W
10inch: 20-25-30-35-40W

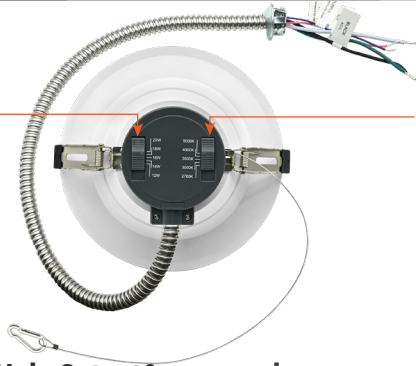


Selectable CCT

2700K, 3000K, 3500K, 4000K, 5000K



Products view

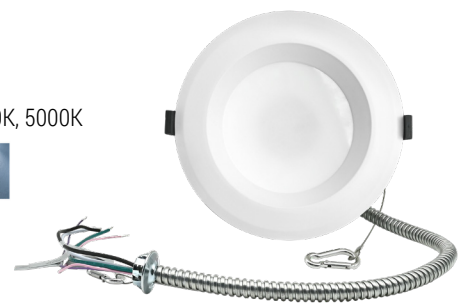

Size & Dimension & Hole Cutout&accessories

Size	Dimension	Hole Cutout	Accessories
4inch			
6inch			
8inch			
10inch			 Hole cutout card Wire nuts

Recommended Dimmer

LUTRON	INTERTEK	LEVITON
DVSTV-WH	KGM-1A010AV	IP710

Luminaire Photometric

