

Catalog Number:

Project Name:

Note:

Date:

Type:

Description

A flexible downlight solution supports surface mounting and retrofit installation.

High quality Iron shell with frosted PC diffuser.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.



4"



6"



8"



Based on sample setting. Actual lumens may vary.

Model#	Size	Wattage	5CCT	Lumens
4HVCT10DK5WH	4inch	10W	2700K	605lm
			3000K	650lm
			3500K	705lm
			4000K	715lm
			5000K	680lm
6HVCT15DK5WH	6inch	15W	2700K	890lm
			3000K	950lm
			3500K	1045lm
			4000K	1040lm
			5000K	935lm
8HVCT18DK5WH	8inch	18W	2700K	1040lm
			3000K	1160lm
			3500K	1305lm
			4000K	1300lm
			5000K	1185lm

Technical Specification

Voltage	120V
Power Frequency	60Hz
Power Factor	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
Beam Angle	110°
Material	Iron+PC
Color	White / Black / Bronze / Brushed Nickel
Lifespan	≥50,000hours
Operating Temp	(-4°F~113°F) -20~45°C
Dimmable	Triac Dimming
Rating	Suitable for Wet Locations
Warranty	5 year limited

Dimming

Triac dimmable down to 10%. Compatible with most major brands of dimmers.

Installation

With multiple apertures, can be installed into any 5 or 6inch Recessed Can, or 2.75/3.5inch and 4inch Junction Box, ideal for under soffit and shower installations.

Lifespan

This luminaire is built with the highest quality 120V drivers, ensuring energy efficiency. With a lifespan of 50,000 hours, it can last decades under normal operation!

Listing



ETL Listed. FCC. Energy Star. Title24.

Color Options



Catalog Number: Project Name: Note: Date: Type:

Installation Hole Position


4inch

■ 3.5"Junction Box installation hole



6inch

- 5" or 6" Recessed installation hole
- 2.75"Junction Box installation hole
- 3.5"Junction Box installation hole
- 4"Junction Box installation hole



8inch

- 5" or 6" Recessed installation hole
- 2.75"Junction Box installation hole
- 3.5"Junction Box installation hole



CCT Selection

Anticlockwise to open the outside lens



Flip the switch to choose desired CCT

Selectable CCT




Selectable CCT




Dimension


4inch

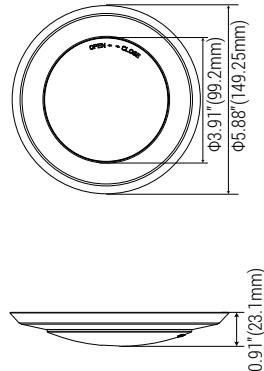

6inch

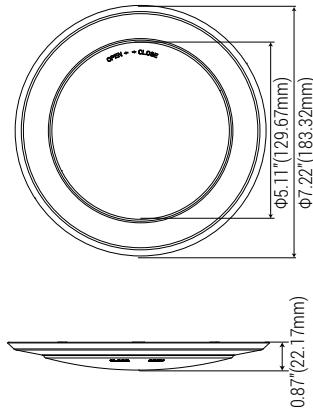

8inch

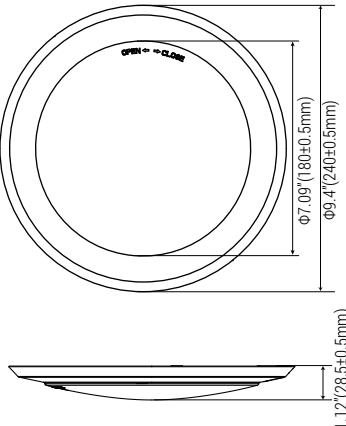


Recommended Dimmer

LUTRON			LEVITON	
TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH DVCL-153P PD-6WCL	MSCL-OP153M MACL-153M//MA-R	6672 6674 DSL06 PL06 RNL06

Catalog Number: Project Name: Note: Date: Type:

Accessories

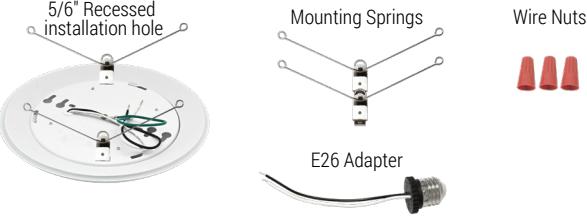	Surface Mount Accessories			Retrofit Accessories		
4inch	3.5" Junction Box installation hole 	Wire Nuts	3	Screws 1	2	/
6inch	2.75"/3.5"/4" Junction Box installation hole 	Wire Nuts	3	Screws 1	2	
8inch	3.5" Junction Box installation hole  2.75" Junction Box installation hole 	Wire Nuts	3	Screws 1	2	