

Catalog Number :

Project Name :

Note :

Date :

Type :

DESCRIPTION

The series of led ceiling-mount luminaires, with their low-profile white frosted acrylic Diffusers, finishes available in black, brushed nickel, make a perfect solution for commercial and decorative applications. Features color tunable technology lets the user choose between 2700k, 3000k, 3500k, 4000k, or 5000k. This surface mount fixture is ideally suited for large kitchens, living rooms, office spaces, and entryways.



24"



32"



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
CL05-24-38-UC5-D	38W	2700K	2100lm
		3000K	2280lm
		3500K	2350lm
		4000K	2450lm
		5000K	2320lm

MODEL#	WATTAGE	5CCT	LUMENS
CL05-32-50-UC5-D	50W	2700K	2800lm
		3000K	3000lm
		3500K	3100lm
		4000K	3340lm
		5000K	3050lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	Iron+PS
COLOR	Brushed Nickel/Black/Bronze
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

COLOR OPTIONAL



FEATURES

- Emits evenly, without halo and shadow
- Fit 2.75"/3.5" J-Box
- Easy to install

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.



Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------





EASILY FLIP THE SWITCH FOR DESIRED CCT



INSTALLATION HOLE POSITION



DIMENSION

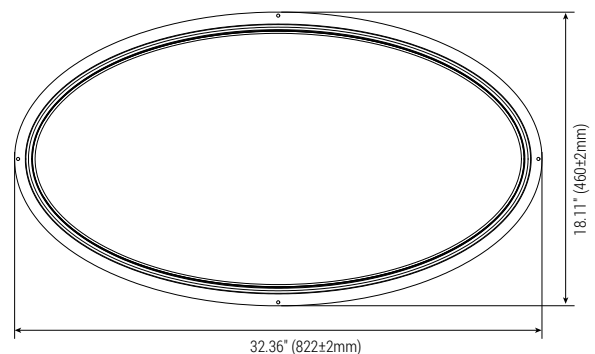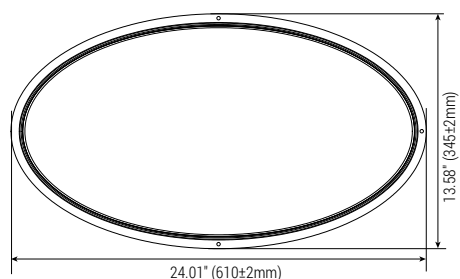

RECOMMENDED DIMMER

LUTRON					LEVITON		
CTCL-153P	DVCL-153P	PD-6WCL	MACL-153MA	RCL-153RNL	6672	DSL06	RNL06
TGCL-153PH-WH	MSCL-OP153M	CT-103PR-WH	DVWCL-153PH	DVRF-6L CTCL-150H			