

Catalog Number:

Project Name:

Note:

Date:

Type:

DESCRIPTION

LED Ultra-thin night light is a fixture with modern technology, ultra-thin lamp body, and also have night Light function . It is suitable for bedrooms, kitchens, hallways ,etc.

3"



4"



6"



8"



BASED ON SAMPLE SETTING.ACUAL LUMENS MAY VARY.

| MODEL# | MAIN LIGHT WATTAGE | LUMEN | NIGHT LIGHT WATTAGE |
|---------------|--------------------|-------|---------------------|
| 3EJCT06SR05-N | 6W | 390Lm | 3W |

| MODEL# | MAIN LIGHT WATTAGE | LUMEN | NIGHT LIGHT WATTAGE |
|---------------|--------------------|-------|---------------------|
| 4EJCT09SR05-N | 9W | 630Lm | 3W |

| MODEL# | MAIN LIGHT WATTAGE | LUMEN | NIGHT LIGHT WATTAGE |
|---------------|--------------------|--------|---------------------|
| 6EJCT12SR05-N | 12W | 1000Lm | 3W |

| MODEL# | MAIN LIGHT WATTAGE | LUMEN | NIGHT LIGHT WATTAGE |
|---------------|--------------------|--------|---------------------|
| 8EJCT18SR05-N | 18W | 1400Lm | 3W |

TECHNICAL SPECIFICATION

| | |
|-----------------|---------------------------------------|
| VOLTAGE | 120V |
| POWER FREQUENCY | 60Hz |
| POWER FACTOR | >0.9 |
| MAIN LIGHT CCT | 2700K 3000K 3500K 4000K 5000K |
| NIGHT LIGHT CCT | 2000K |
| CRI | 90 |
| BEAM ANGLE | 120° |
| MATERIAL | AL+PS |
| COLOR | White |
| LIFESPAN | ≥50,000hours |
| OPERATING TEMP | (-4°F~ 113°F) -20~45°C |
| DIMMABLE | Triac Dimming |
| RATING | Suitable for Wet Locations |
| WARRANTY | 5 year limited |

FEATURES

- Soft amber hue when night light mode activated
- Without recessed cans or a separate j-box
- CRI 90 for true color rendering
- No flicker

INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. FCC.



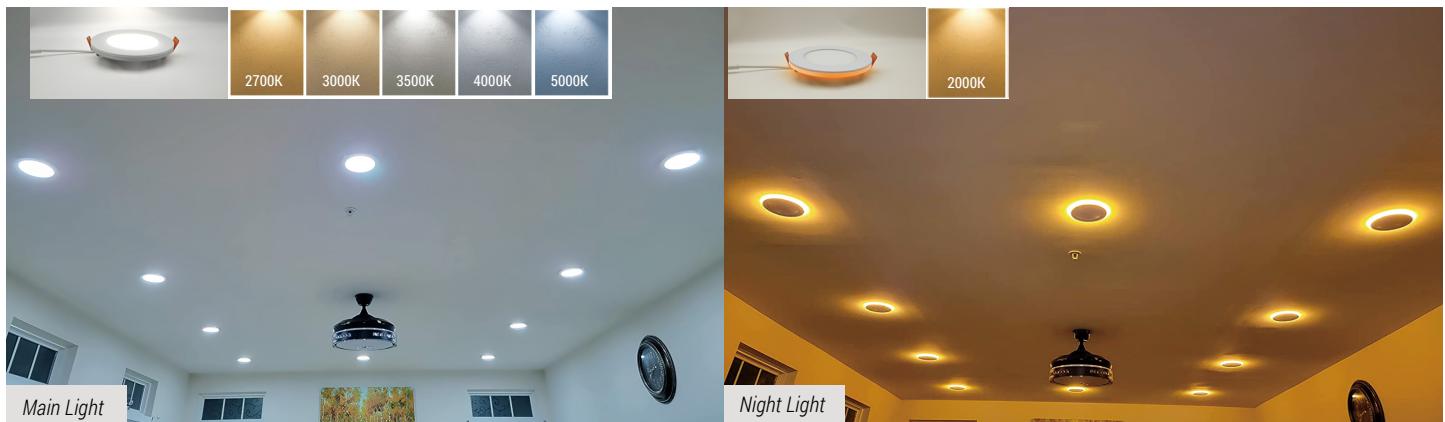
Catalog Number:

Project Name:

Note:

Date:

Type:



1. Selecting main light mode or night light mode

The product has two modes: main light mode and night light mode.

Main light mode provides full brightness and allows selection from five color temperatures: 2700K, 3000K, 3500K, 4000K and 5000K.





Night light mode provides reduced light output at 2000K color temperature for very soft illumination at night.

2. Convenient control using light switch

Every time when you turn on the downlight, it will always be in main light mode.

Switch the downlight off and back on again within (1-4) seconds to activate night light mode.

NOTE: The main downlight will not provide light output when the night light trim is illuminated.

| Size | Dimension | Hole Cutout |
|-------|---|---|
| 3inch |   |  |
| 4inch |   |  |
| 6inch |   |  |
| 8inch |   |  |

RECOMMENDED DIMMER

| LUTRON | | LEVITON | | | |
|--|--|-------------------------------|--|-------------------------|--------------|
| TG-600PR-WH CTCL-153PDH-WH SLV-600P-AL | DV-600PR-WH SCL-153PH-WH DVCL-153P | TG-600PR-WH CTCL-153PDH-WH | SLV-600PR-WH DV-600PR-WH SCL-153PH-WH DVCL-153P | RNL06 IPL06 DSL06 | 6672 6674 |


ACCESSORIES



J-Box driver



Connector



Hole cutout card