


DESCRIPTION

Aluminum reflector with architectural white finish. Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K. Wet-location rated, ideal for hotels, corridors, home decoration, shopping malls, schools. Available size: 4", 6"

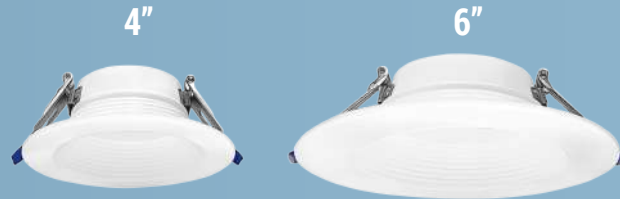

BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-4EJCT10LR05	4inch	10W	2700K	704Lm
			3000K	754Lm
			3500K	806Lm
			4000K	799Lm
			5000K	728Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-6EJCT15LR05	6inch	15W	2700K	1151Lm
			3000K	1254Lm
			3500K	1331Lm
			4000K	1326Lm
			5000K	1198Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	PC+AL
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

FEATURES

- Emits evenly, without halo or shadows.
- Continuous dimming from 100% to 10% with many Triac Dimmers
- No need housing

INSTALLATION

No existing recessed housing or junction box required. Suitable for most new constructions. Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. Energy Star. Title24.


Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

4inch & 6inch : Easily flip the switch for desired CCT

Products view




SIZE & DIMENSION

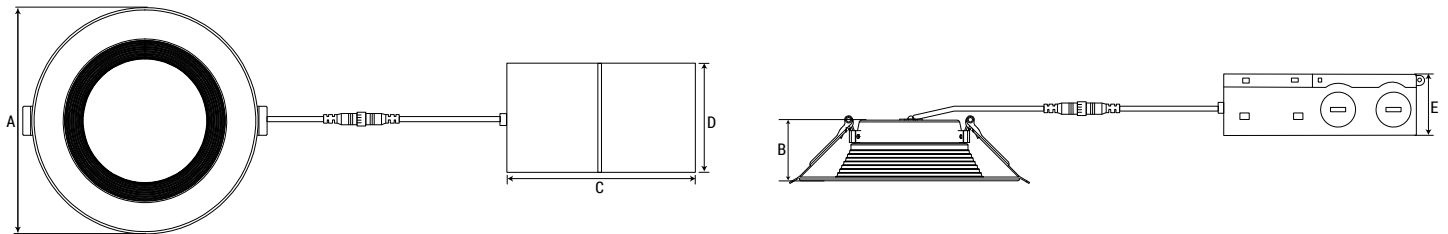

SIZE	A	B	C	D	E
4inch	Φ5.51"(140mm)	2.03"(51.6mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ7.36"(187.07mm)	2.03"(51.6mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

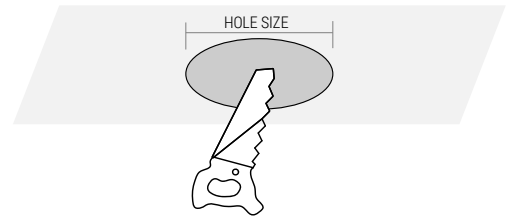

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	IPL06

ACCESSORIES

PART	DESCRIPTION	QUANTITY
A	J-Box driver	1
B	Connector	3
C	Hole cutout card	1

