

Catalog Number:

Project Name:

Note:

Date:

Type:

Description

The fixture is made of die-cast aluminum with a white surface. It features a lens design, offering excellent color rendering and high brightness.

The fixture shade head has a 180 degree tilt and 355 degree rotation, and a narrow beam angle of 45° to highlight architectural or artistic elements in your home.

Selectable CCT and wattage.

It's the ideal fixture for lighting art and displays in commercial and residential applications.



Based on sample setting. Actual lumens may vary.

Model#	Wattage	5CCT	Lumens
TL02-70-15-US3C5-D	9-12-15W	2700K	820-1030-1220lm
		3000K	830-1070-1275lm
		3500K	860-1100-1350lm
		4000K	850-1080-1400lm
		5000K	850-1070-1320lm

Features

Professional optical lens, uniform light.

Powder coated surface treatment is durable and not easy to fall off.

Excellent aluminum reflector offers even and better light color, bringing visual comfort.

Tilting gimbal light source.

Dimming

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

Electrical

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

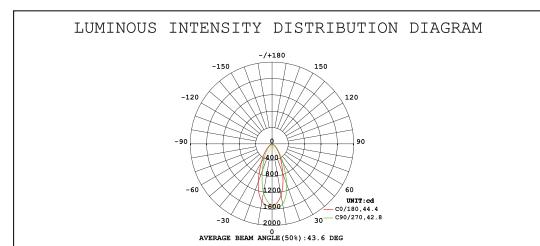
Energy Savings

80% more energy savings than halogen lamps.

Technical Specification

Voltage	120V
Power Frequency	60Hz
Power Factor	>0.9
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
Beam Angle	45°
Material	Die-cast aluminum+lens
Color	White / Black
Lifespan	≥50,000hours
Operating Temp	(-4°F~113°F) -20~45°C
Dimming	Triac Dimming
Rating	Suitable for Wet Locations
Warranty	5 year limited

Luminaire Photometric



Listing

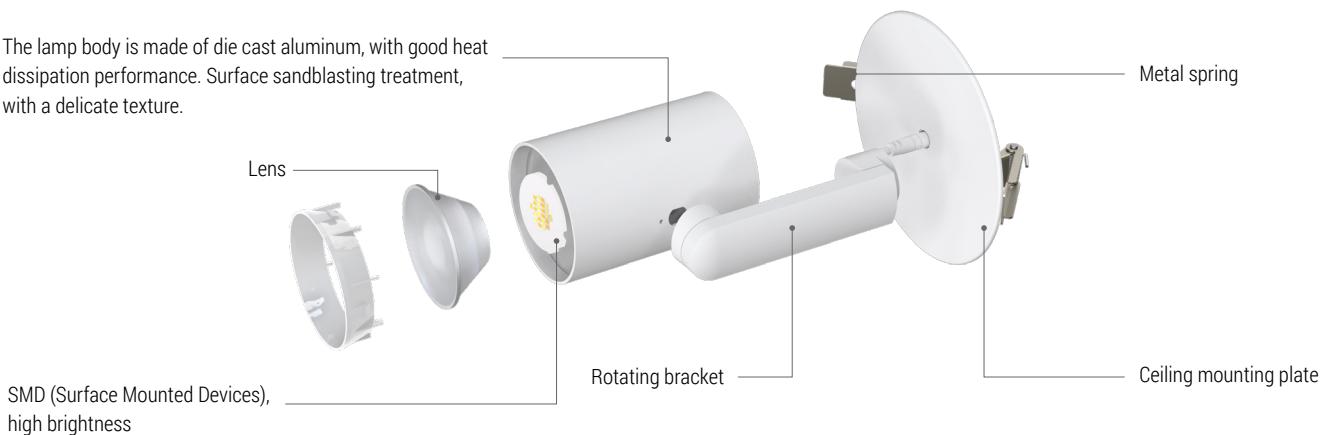


ETL Listed. Energy Star. Title24. FCC.

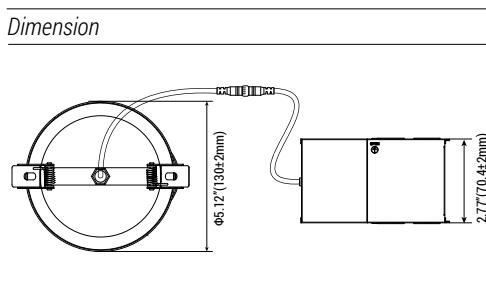
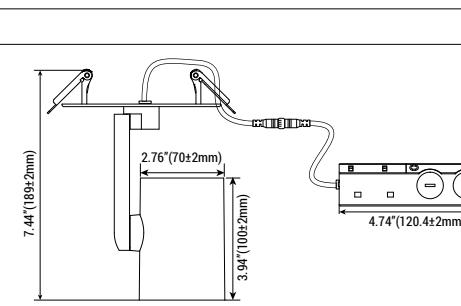

Catalog Number: Project Name: Note: Date: Type:



The lamp body is made of die cast aluminum, with good heat dissipation performance. Surface sandblasting treatment, with a delicate texture.



Dimension & Hole Size & Accessories

Dimension	Hole Cutout	Accessories
	 Hole Size: Ø4 21/64"(110mm)	 Hole cutout card

Recommended Dimmer

LUTRON				LEVITON		
CTCL-153P TGCL-153PH-WH	DVCL-153P MSCL-OP153M	PD-6WCL CT-103PR-WH	MACL-153MA DVWCL-153PH	RCL-153RNL DVRF-6L CTCL-150H	6672	DSL06 RNL06